

UNCOOLED INFRARED CAMERAS

New 17 μ m Pixel Design!

PV 640

Uncooled Infrared Camera with VGA Resolution

PV640LW - Long-wave 8-14 μ m spectral response

- Long-wave IR (8-14 μ m) spectral response
- < 50mK detector thermal sensitivity
- 17 μ m pixel technology
- Wide variety of lens options
- GigE or Camera Link digital output
- Available with either 60 Hz and <9 Hz frame rate




Incorporating an advanced 640x480 microbolometer detector array, the PV640 Uncooled Infrared Camera delivers high resolution infrared images in a VGA format. Because it accepts a variety of infrared objective lenses and with either Gigabit Ethernet or Camera Link digital video output models, the camera is ideal for a wide variety of applications that benefit from its impressive resolution and thermal sensitivity. In addition, the PV640's short thermal time constant produces superior thermal image quality even while imaging fast moving objects.

Because the PV640 uses an infrared detector array having a very short thermal time constant, thermal images have reduced blur due to object/camera motion. This makes them ideal for use in portable thermal imagers as well as imagers that are used on moving vehicles or that image objects in motion.



| | |
|----------------------------|---|
| Infrared Detector | Uncooled microbolometer |
| Array Size | 640 x 480 pixels |
| Pixel Pitch | 17 μ m detector |
| Spectral Range | 8-14 μ m |
| Frame Rate | 60Hz, optionally < 9Hz |
| Thermal Time Constant | < 10ms |
| Detector Sensitivity (f/1) | < 50mK |
| Additional Features | Non-uniformity correction, auto/manual gain, BPR, digital zoom, digital filtering, external synchronization |

Typical Spectral Response*

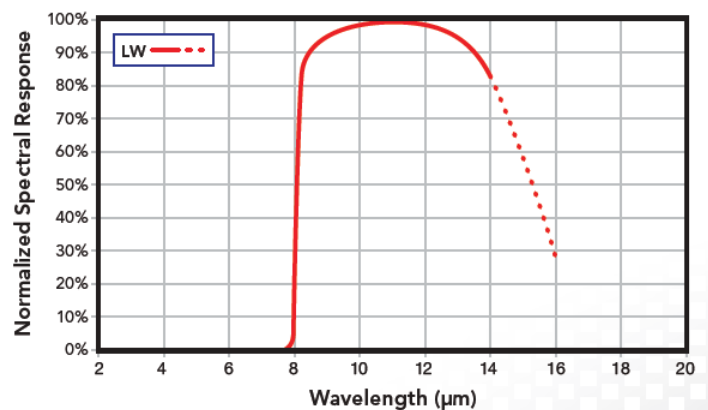



* Detector spectral response. Excludes lens transmission.





UNCOOLED INFRARED CAMERAS

PV 640

PV640 IMAGER SPECIFICATIONS

| |  |  |
|---------------------------------|--|---|
| Description | Camera Link | GigE |
| Operating Temperature Range | -40°C to 60°C | -20°C to 60°C |
| Non-operating Temperature Range | -45°C to 70°C | -25°C to 70°C |
| 14-bit Streaming Digital Output | Camera Link | GigE |
| Serial Control Interface | Camera Link | GigE |
| Graphical User Interface | Included | Included |
| Size (lens not included) | 2.4"x 2.7"x 2.7" (W x H x L) | 2.4"x 2.7"x 3.7" (W x H x L) |
| Weight (lens not included) | < 0.4kg | < 0.5kg |
| Input Voltage | 6-12 VDC | 6-12 VDC |
| Power Consumption | < 2.2 W | < 3.6 W |


PV640 ORDERING INFORMATION

| Photo | Part Number | Description |
|--|-------------|---|
|  13mm f/1.1 HFOV=45° Manual focus | 915426 | PV640LW Camera, 13mm F1.1 MF Lens, 60Hz, Camera link |
| | 915427 | PV640LW Camera, 13mm F1.1 MF Lens, 9Hz, Camera link |
| | 915428 | PV640LW Camera, 13mm F1.1 MF Lens, 60Hz, GigE |
| | 915429 | PV640LW Camera, 13mm F1.1 MF Lens, 9Hz, GigE |
|  25mm f/1.2 HFOV=25° Fixed focus athermal | 915430 | PV640LW Camera, 25mm F1.2 FFA Lens, 60Hz, Camera link |
| | 915431 | PV640LW Camera, 25mm F1.2 FFA Lens, 9Hz, Camera link |
| | 915432 | PV640LW Camera, 25mm F1.2 FFA Lens, 60Hz, GigE |
| | 915433 | PV640LW Camera, 25mm F1.2 FFA Lens, 9Hz, GigE |
|  50mm f/1.0 HFOV=12.5° Manual focus | 915434 | PV640LW Camera, 50mm F1.0 MF Lens, 60Hz, Camera link |
| | 915435 | PV640LW Camera, 50mm F1.0 MF Lens, 9Hz, Camera link |
| | 915436 | PV640LW Camera, 50mm F1.0 MF Lens, 60Hz, GigE |
| | 915437 | PV640LW Camera, 50mm F1.0 MF Lens, 9Hz, GigE |
|  50mm f/1.2 HFOV=12.5° Fixed focus athermal | 915438 | PV640LW Camera, 50mm F1.2 FFA Lens, 60Hz, Camera link |
| | 915439 | PV640LW Camera, 50mm F1.2 FFA Lens, 9Hz, Camera link |
| | 915440 | PV640LW Camera, 50mm F1.2 FFA Lens, 60Hz, GigE |
| | 915441 | PV640LW Camera, 50mm F1.2 FFA Lens, 9Hz, GigE |

UNCOOLED INFRARED CAMERAS

PV 640

D*STAR Digital Storage and Retrieval Image Processing Software Suite for R&D Applications

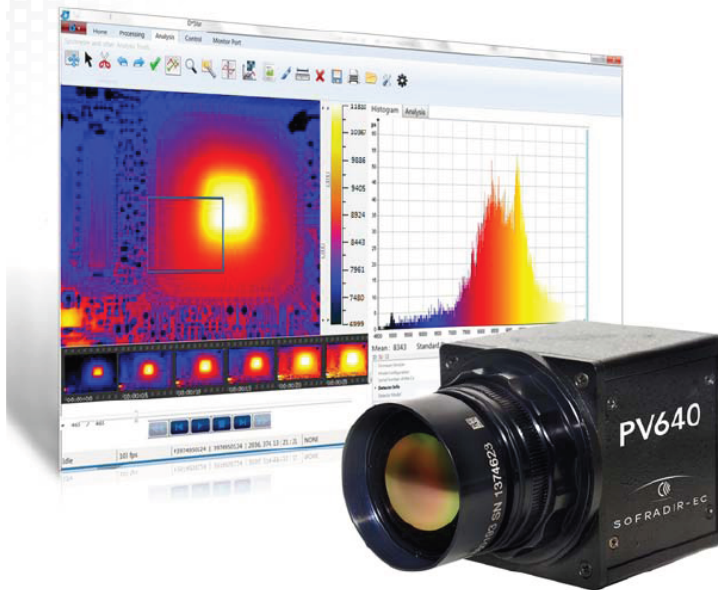

- Real-time digital recording
- Powerful analysis tools
- Intuitive user interface

D*STAR™ is a real-time image capture software package for the PV640. D*STAR features a highly intuitive user interface and a library of powerful tools that enable the sophisticated analysis of thermal behavior for a wide range of objects and materials.

- **Real-Time Digital Recording:** The PV640's digital output is displayed in real-time on your PC for live analysis or recording. Easily convert sequences to an AVI file suitable for Windows Media Player and frames to JPGs with the touch of a button.
- **Powerful Analysis Tools:** D*STAR features a large selection of real-time analysis tools including spot meters, line profile, region of interest analysis box.
- **Intuitive User Interface:** D*STAR features simple-to-understand controls that ensure you're up and running fast. Image recording and playback mimic standard DVD controls and camera control dialog boxes are easy to understand. Intuitive user controls allow simple image reduction, analysis, and archiving.

FEATURES

IMAGE MANAGEMENT

- Real-time recording and playback
- Single image capture and playback
- 14-bit image sequence conversion to AVI files
- Export of data to standard files

IMAGE PROCESSING

- Multiple color palette selections
- Image averaging (improves sensitivity)
- Span and level control
- Automatic Gain Correction

IMAGE ANALYSIS

- Spot meters
- Line Profiles
- Regions of Interest — User-defined rectangle
- Histogram Analysis (line, ROI)
- Time plot (all tools)

PV640 DESKTOP SOFTWARE

| Description | Part Number |
|---|-------------|
| D*Star Digital Storage and Retrieval Image Processing Software Suite for PV640. To be used in infrared imaging research and development applications. | 925356 |

Technical characteristics described in this data sheet are for information only and are not contractual. Because of ongoing product enhancements, specifications are subject to change without notice. Export of these products from the United States is controlled by the US Government. Prior authorization is required for re-export or transfer.



TE LINTELO SYSTEMS BV
Electro-Optical Laser Applications

Te Lintelo Systems BV
Stijn Streuvelsstraat 2
6901 KT Zevenaar
The Netherlands Phone: 0031(0) 316-340804
E-mail: sales@tlsbv.nl Website : www.tlsbv.nl